

California

1845 Industrial Drive Auburn, California 95603 Telephone: (530) 885-1482 Facsimile: (530) 885-0593 <u>Kansas</u>

307 Plymate Lane Manhattan, Kansas 66502 Telephone: (785) 539-6305 Facsimile: (415) 358-4340

smoothroad.com


Custom Test Equipment • Mobile Technology Solutions

CS9200 Multiple Purpose Profiler



Self-Contained Hybrid Lightweight or High Speed Profiling System



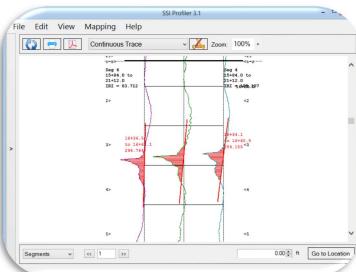

CS9200 Trailer Profiling Systems

Profiling System Specifications

- Collect data up to 65 mph (105 kph)
- Meets E950, AASH M328, R054, R056-057
- Meets or exceeds all Class I requirements of ASTM E950.
- 1 inch sampling interval at all collection speeds.
- Features LMI Technologies' new 5 kHz Gocator wide beam lasers for asphalt and concrete pavements.
- ±5g rated Accelerometers with 0.0001g accuracy.
- Proven ability to replicate wavelengths of ~0.25 feet (7.62mm) in excess of 760 feet (231.6 meters).

Compliance and Equipment

- All sensors and electronics embedded into a selfcontained professionally engineered trailer platform.
- Adjustable air suspension Interior storage.
- Complies with commonly used DOT specifications.
- Core electronics manufactured in an ISO 9001 facility.

TOUGHBOOK rugged computer on all systems.

- Custom docking station mount for comfort and access.
- All systems run off of a 12 volt power supply

Operation, Training & Support

- One person operation from cab of host vehicle.
- Powered by 12V from tow vehicle •Speed range:5-65mph
- Operating ambient temperature range: 32° to 110° F.
- Moisture: profiling system components impervious to moisture (but quality of data degrades on wet pavement).
- Worldwide multi-lingual operator training available.
 - Automatic software updates with SSI Profiler 3 2015
- In field replacement of portable, modular components.
- Warranty and rapid response customer support on all profiling system components and operations.
- Options: high resolution GPS (RTK corrected) with CAD output, HD camera, rut measurement, printer and more.

Best-In-Class Profiling System Software

- Windows 7/8 Professional software programs.
- Easy calibration instructions for bounce test, laser verification, accelerometer and distance calibrations.
- On screen visual aids and fast reporting of profile results.
 - Google Earth, Google Maps Support for

and Microsoft MapPoint

- MapPoint
- Navigate to locations within profile data using real time **GPS Tracker** and navigational/mapping capabilities.
- User selectable parameters for English and Metric units.
- Real time data display of profile trace.
- Electric Eye data triggers on each side of system function at 30+ feet (10+ meters).
- User programmable keyboard shortcuts
- SSI "Continuous Collection" software suspends collection below 5 mph and resumes when speed exceeds 5 mph.
- Pause areas integrated into collection. View paused areas separately or exclude.
- Multiple Profile Indexes: IRI (International Roughness Index, Mean IRI (MRI), Half Car Ride Index (HRI), Profile Ride Index (PRI), Ride Number (RN).
- Multiple outputs for Areas of Localized Roughness: IRI based roughness based on user specified thresholds; Rolling Straightedge, Profilograph must-grind bump template, Texas 1001-S localized roughness,
- Raw data is rewritable: change parameters at any time.
- User defined filtering values for high and low pass filters.
- Patented multiple trace reporting capability.
- Export data into PROVAL (PPF, ERD), PDF, Excel, CSV, PRO, CAD, Survey, and Text
- Data is encrypted for security.



▲ Computer Instructed Calibration and Data Collection Routines ▲



▲ Gocator Wide Footprint Laser ▲



▲ In-Cab Touchscreen Computer ▲

SURFACE SYSTEMS & INSTRUMENTS, INC.

<u>California</u>

1845 Industrial Drive, Auburn, California 95603 Tel: (415) 383-0570 • Fax: (415) 358-4340 smoothroad.com

Kansas

307 Plymate, Manhattan, Kansas 66502 Tel: (785) 539-6305 • Fax: (415) 358-4340 info@smoothroad.com

